ER12-1400

ER12-1400,

Maxium payload 12 kg with maxium reach 1391 mm.

Highlights

The ER12-1400 robot has a maximum load of 12 kg and an arm span of 1391 mm, which is characterized by a wide working range and strong load capacity;

The highly rigid wrist design and control algorithm can improve the positioning accuracy and dynamic performance of the robot. The repetitive positioning accuracy can reach 0.03 mm, the positioning time is 0.2 s; 3The fully enclosed mechanical body is not only compact in structure, but also covers a small area of 260 mm * 260 mm. It has high dust-proof and waterproof

EFORT

performance and secondary protection characteristics for special applications.

Applications

It can be used for handling operations (machine tending), sorting, assembling, grinding, polishing, Arc welding, etc.

Industries


Suitable for PCB, electronic manufacturing, plastic, metal parts and other industries.

EFORT


SPECIFICATIONS

Model		ER12-1400
Туре		Articulated
Controlled axes		6 Axes
Max. payload on wrist		12 kg
Repeatability		±0.03 mm
Robot weight		90 kg
Reach		1391 mm
Robot IP grade		IP65 / IP67 (Wrist)
Cabinet IP grade		IP20/ IP54 (Optional)
Drive mode		AC servo drive
Installation		Floor, Wall, Upside-down
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80%(No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

OPERATING SPACE

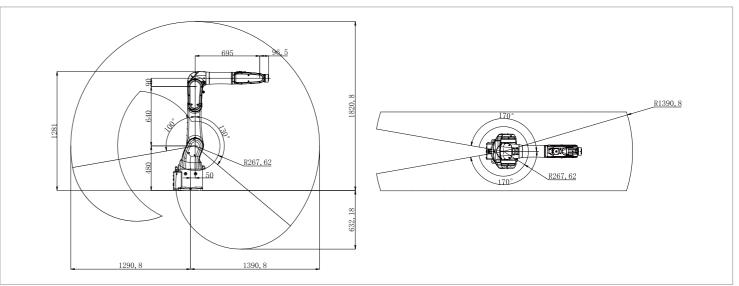

BASE MOUNTING SIZE

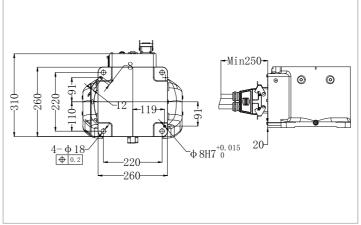

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.

EFORT Intelligent Robot Co., Ltd.

PHONE: (00 86) 400-052-8877 ADDRESS: No. 96, Wanchun East Road, Wuhu, China (Anhui) Pilot Free Trade Zone WWW.EFORT.COM.CN

Allowable load moment at wrist	J 4	25 N•m
	J 5	25 N•m
	J6	12 N•m
Allowable load inertia at wrist	J 4	0.78 kg•m²
	J 5	0.78 kg•m²
	J6	0.3 kg•m²
Maximum speed	J1	200°/sec
	J 2	180°/sec
	J 3	220°/sec
	J 4	400°/sec
	J 5	420°/sec
	J6	600°/sec
	J1	±170°
Motion range	J 2	+100°/-130°
	J 3	+193°/-75°
	J 4	±190°
	J 5	±120°
	J 6	±360°

END FLANGE MOUNTING SIZE

