

ER35-1800

ER35-1800,
Maxium payload 35 kg with maxium reach 1851 mm.

- Highlights**
Thanks to the new design of wrist, inertia and bearing capacity are increased by 25% with wider application scope;
Thanks to the high stiffness transmission design and advanced trajectory algorithm, the improved robot accuracy performance helps customers to face variety of application scenarios;
Lighter weight of the body, 20% less than its predecessor.

- Applications**
It can be used in handling operations, assembling, grinding, polishing, deburring,etc.
- Industries**
Suitable for metal parts, photovoltaic, logistics, food and beverage and other industries.



EFORT Intelligent Robot Co., Ltd.
PHONE: (00 86) 400-052-8877
ADDRESS: No. 96, Wanchun East Road, Wuhu, China
(Anhui) Pilot Free Trade Zone
WWW.EFORT.COM.CN


EFORT

SPECIFICATIONS


Model		ER35-1800
Type		Articulated
Controlled axes		6 Axes
Max. payload on wrist		35 kg
Repeatability		±0.05 mm
Robot weight		240 kg
Reach		1851 mm
Robot IP grade		IP54
Cabinet IP grade		IP20/ IP54 (Optional)
Drive mode		AC servo drive
Installation		Floor, Upside-down
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

Allowable load moment at wrist	J4	110 N•m
	J5	110 N•m
	J6	60 N•m
Allowable load inertia at wrist	J4	4 kg•m ²
	J5	4 kg•m ²
	J6	2 kg•m ²
Maximum speed	J1	220°/sec
	J2	180°/sec
	J3	200°/sec
	J4	350°/sec
	J5	350°/sec
	J6	410°/sec
Motion range	J1	±170°
	J2	+77°-160°
	J3	+156°/-85°
	J4	±190°
	J5	±130°
	J6	±360°


OPERATING SPACE

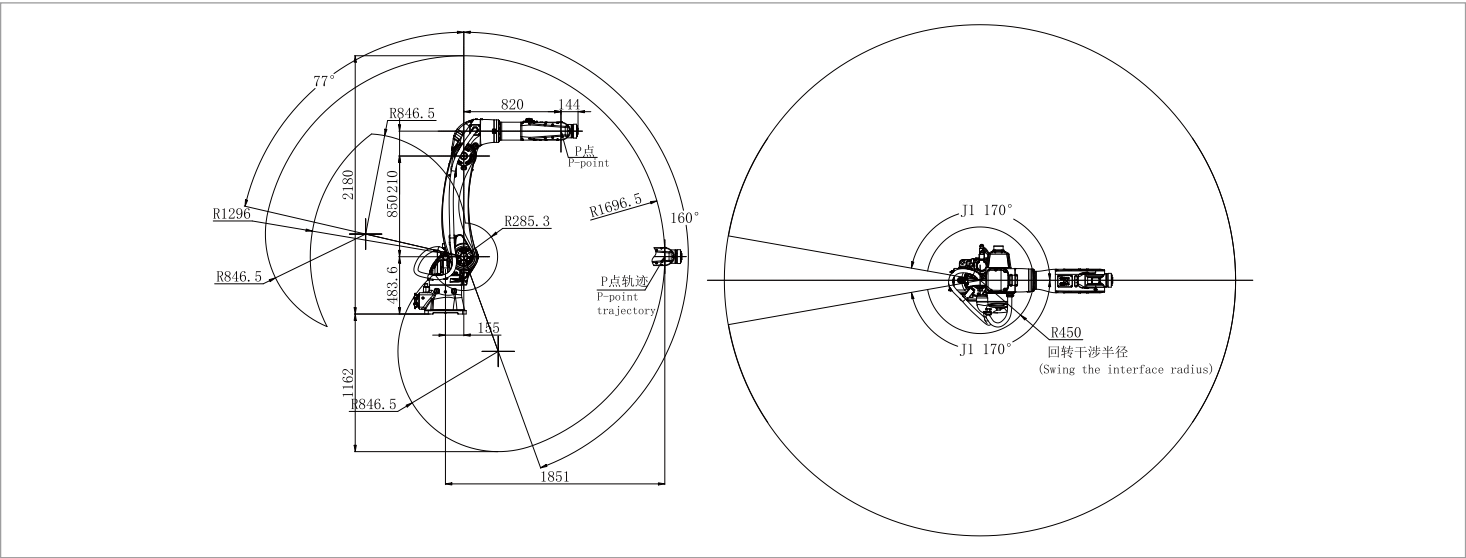

BASE MOUNTING SIZE

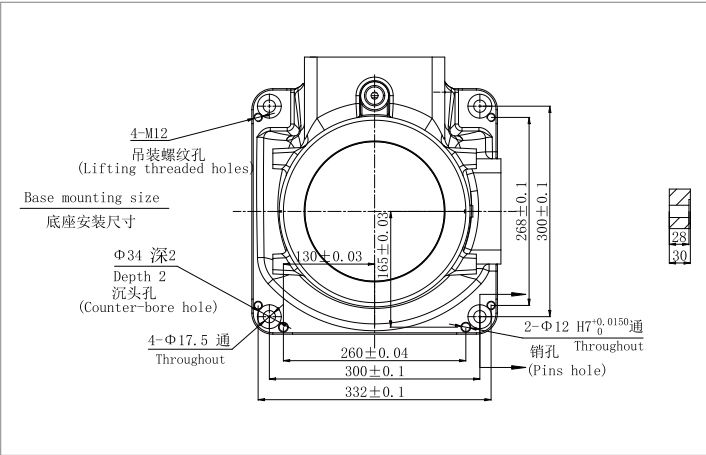

END FLANGE MOUNTING SIZE

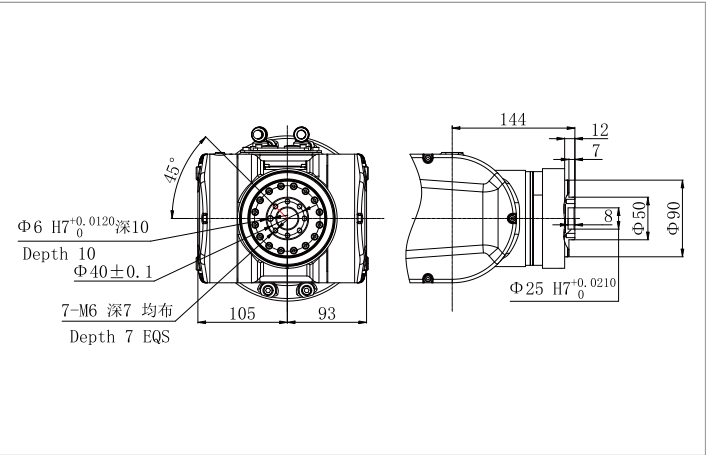

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.